



## Product Data Sheet

### **AMBERLITE™ MB9L H/OH Ion Exchange Resin**

Mixture of Gaussian, Gel, Strong Acid Cation and Strong Base Anion Exchange Resins for Industrial Demineralization Applications

#### **Description**

AMBERLITE™ MB9L H/OH Ion Exchange Resin is a volume-equilibrated mixture of strong acid cation and strong base anion exchange resins. It is fully regenerated, ready-to-use, non-regenerable, pre-mixed resin characterized by high cationic exchange capacity. The pre-mixed resin also allows for faster initial rinse-up prior to service, which minimizes rinse wastewater volume.

AMBERLITE™ MB9L H/OH is specifically designed for a partial demineralization of water when the ratio of alkalinity to free mineral acidity is higher than 1, and where the complete removal of cations and of the acidity is essentially required without the need to fully eliminate CO<sub>2</sub> and silica.

AMBERLITE™ MB9L H/OH is the reference mixed bed for electro-erosion applications. The resin mixture is prepared from high quality components and the proprietary manufacturing process ensures a homogeneous golden light color consistently from batch to batch. In operation, the resin provides a stable water quality and long operational lifetime in most metal cutting systems.

#### **Applications**

- Electro-erosion applications, demineralization of water baths
- Mixed bed polishing for partial demineralization

#### **System Designs**

- Non-regenerated mixed beds

#### **Historical Reference**

AMBERLITE™ MB9L H/OH Ion Exchange Resin has previously been sold as AMBERLITE™ MB9L Ion Exchange Resin.

#### **Typical Properties**

|                            | <b>Cation Resin</b>                              | <b>Anion Resin</b>                               |
|----------------------------|--|--|
| <b>Physical Properties</b> |  |  |
| Copolymer                  | Styrene-divinylbenzene                           | Styrene-divinylbenzene                           |
| Matrix                     | Gel  | Gel  |
| Type                       | Strong acid cation                               | Strong base anion, Type I                        |
| Functional Group           | Sulfonic acid                                    | Trimethylammonium                                |
| Physical Form              | Golden light amber, translucent, spherical beads | Golden light amber, translucent, spherical beads |
| <b>Volume Ratio</b>        | 46 – 55%   | 54 – 45%   |
| <b>Chemical Properties</b> |  |  |
| Ionic Form as Shipped      | H <sup>+</sup>                                   | OH <sup>-</sup>                                  |
| <b>Particle Size</b> §     |  |  |
| < 300 µm                   | ≤ 5.0%   |  |
| <b>Density</b>             |  |  |
| Shipping Weight            | 720 g/L  |  |

§ For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 177-01775).

## Product Performance

### Operating Capacity

The operating capacity of AMBERLITE™ MB9L H/OH Ion Exchange Resin can be estimated using the following formula, which gives an approximate determination of volume of water that can be treated:

$$BV = \frac{600}{TDS \text{ (meq/L)}} \quad \text{or} \quad \text{gal/ft}^3 = \frac{224000}{TDS \text{ (as ppm CaCO}_3\text{)}}$$

where BV (Bed Volume) is the number of liters of a feedwater containing a TDS (Total Dissolved Solids) given in meq/L that can be demineralized with one liter of the resin mixture when run to exhaustion (or US gallons per cubic foot of the resin with TDS as ppm CaCO<sub>3</sub>).

### Treated Water Quality

AMBERLITE™ MB9L H/OH Ion Exchange Resin provides a high-quality demineralized water with a conductivity < 10 µS/cm and neutral pH that will satisfy the electrical discharge machining operations.

## Suggested Operating Conditions

|  |                       |
|--|-----------------------|
| Temperature Range (H <sup>+</sup> /OH <sup>-</sup> form) † | 5 – 60°C (41 – 140°F) |
|--|-----------------------|

† Operating mixed beds at elevated temperatures, for example above 60 – 70°C (140 – 158°F), may impact the purity of the loop and resin life. Contact our technical representative for details.


For additional information regarding recommended minimum bed depth and operating conditions for [mixed beds](#) (Form No. 177-03705) or [separate beds](#) (Form No. 177-03729) in water treatment, please refer to our Tech Facts.

## Hydraulic Characteristics

Estimated pressure drop for AMBERLITE™ MB9L H/OH Ion Exchange Resin as a function of service flowrate and temperature is shown in Figure 1. These pressure drop expectations are valid at the start of the service run with clean water and a well-classified bed.

**Figure 1: Pressure Drop**

Temperature = 10 – 60°C (50 – 140°F)

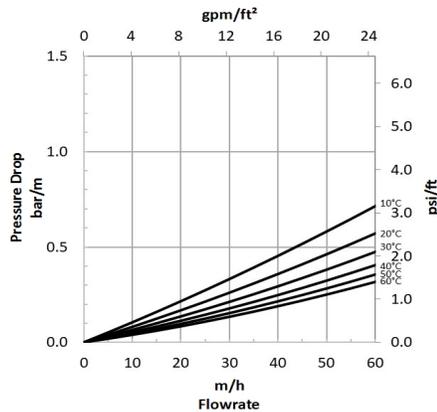

## Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products— from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Have a question? Contact us at:

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with a ™, ™, or ® are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours Inc. Copyright © 2019 DuPont de Nemours Inc. All rights reserved.

